



# STABILIZER Boots&Buck

## AVR Automatic Voltage Regulator

### STABILIZER 3-5KVA



#### Front panel :



Smart Switch

SKD THE SMART CHOICE UPS




UPS & AVR MANUFACTURER



## Power Star Color Series (Nema 5-15R / Nema Universal)

Power Star Pro 3-5KVA series provides 7-step voltage regulation to stabilize output voltage for protecting connected devices from damage. With user-friendly LCD display, users acknowledge UPS status more easily. To ensure safety of devices connection, Power Star Pro 3-5KVA series embedded with thermal switch for over-temperature protection. With time-delay function, it can avoid connected devices from sudden electrical surges when power is recovered.

#### Rear panel :

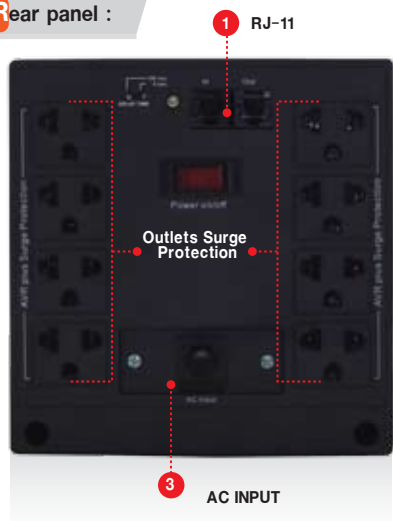

1 RJ-11

3 AC INPUT

### ◆ Features / คุณสมบัติ

## 3000-5000VA

- Provide stable output voltage through boost and buck stabilizer
- Accept wide input range
- Provide modem / phone line surge protection
- Provide overload & short circuit protection
- Built-in thermal switch for over-temperature protection
- Metal housing
- Comprehensive LCD display shows detailed information of AVR status phone (Optional)
- 8 Outlet Socket

# STABILIZER Boots&Buck AVR

**S**pecification:

**AVR 3000-5000VA**

MODEL	AVR-3000	AVR-4000	AVR-5000
CAPACITY	3000VA/1500W	4000VA/2000W	5000VA/2500W
<b>INPUT</b>			
Voltage	110 / 115 / 120Vac or 220 / 230 / 240Vac		
Voltage Range	110 / 115 / 120Vac: 70-147Vac ; 220 / 230 / 240Vac: 140-295Vac		
Frequency Range	50/60Hz		
<b>OUTPUT</b>			
Steps of Regulation	7 (4-steps Boost & 3-steps Buck)		
Regulation	+/- 5%		
Output Receptacles	Nema5-15R*8pcs AVR regulated & surge protected or Universal Nema*8pcs AVR regulated & surge protected or German/Universal*6pcs AVR regulated & surge protected		
Protection	Network surge suppression: RJ-45		
	Overload / short circuit: manual reset circuit switch		
	Over-temperature: thermal switch		
<b>INDICATORS</b>			
LCD Display	Input voltage, Output voltage, Normal/Low Volt./Boost/Buck/High Volt./Overheat/Overload /Delay information		
<b>ENVIRONMENT</b>			
Humidity	0-95% (Non-condensing)		
Noise Level	Less than 40dB at 1M		
<b>PHYSICAL</b>			
Dimension	250*157*157MM		
Net Weight	4.5kgs	5.25kgs	6.9kgs



**AVR**  
**Automatic Voltage Regulator**  
**STABILIZER 3-5KVA**

\*Product specifications are subject to change without further notice.